

Cerberus NetSTATS


SNMP Configuration Guide - Draytek

The following details the steps you need to make your router ready for use with the Cerberus NetSTATS broadband monitoring service.

It is recommended that you connect your computer directly to the device to make the configuration changes. This may require you to change the IP address of your computer to be able to contact the router on its management IP. Please review configuration support documentation for your own operating system on how to do this.

Once connected to the router follow the steps below.

1. Access the router web interface using the default IP address by visiting <http://192.168.1.1> in your web browser.
2. Using the menu on the left hand side navigate to **System Maintenance** and then click on **Management**. Once you're in the Management window. Tick the option **Enable SNMP Agent**, and then in the field **Get Community** set the *SNMP Read Community String*.
3. Check the **Allow management from the Internet** check box.

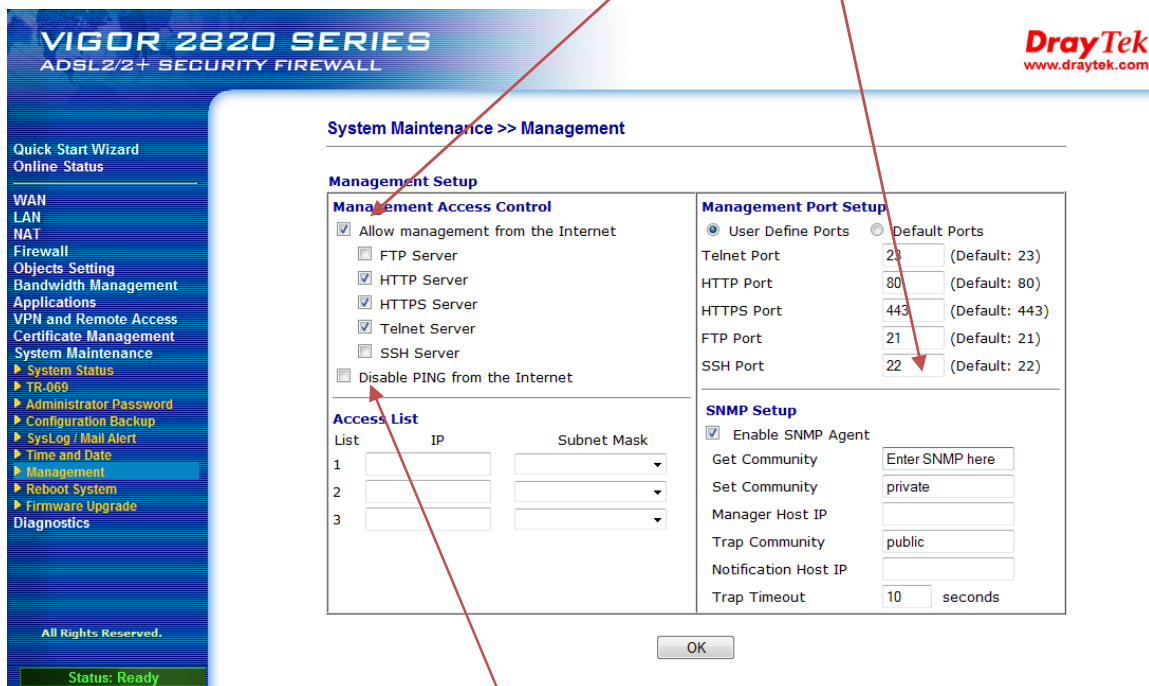

VIGOR 2820 SERIES
ADSL2/2+ SECURITY FIREWALL

DrayTek
www.draytek.com

Quick Start Wizard
Online Status

WAN
LAN
NAT
Firewall
Objects Setting
Bandwidth Management
Applications
VPN and Remote Access
Certificate Management
System Maintenance
▶ System Status
▶ TR-069
▶ Administrator Password
▶ Configuration Backup
▶ SysLog / Mail Alert
▶ Time and Date
▶ Management
▶ Reboot System
▶ Firmware Upgrade
Diagnostics

All Rights Reserved.
Status: Ready

System Maintenance >> Management

Management Setup

Management Access Control

Allow management from the Internet

FTP Server

HTTP Server

HTTPS Server

Telnet Server

SSH Server

Disable PING from the Internet

Management Port Setup

User Define Ports Default Ports

Telnet Port 23 (Default: 23)

HTTP Port 80 (Default: 80)

HTTPS Port 443 (Default: 443)

FTP Port 21 (Default: 21)

SSH Port 22 (Default: 22)

Access List

List	IP	Subnet Mask
1	<input type="text"/>	<input type="text"/>
2	<input type="text"/>	<input type="text"/>
3	<input type="text"/>	<input type="text"/>

SNMP Setup

Enable SNMP Agent

Get Community

Set Community

Manager Host IP

Trap Community

Notification Host IP

Trap Timeout seconds

OK

3. You will also need to ensure that ping feature has been enabled on the router by removing the tick from the option **Disable PING from the Internet**.
4. Configuration is now complete. You can now close your web browser.

Should you have any queries on how to carry out these procedures, please contact our support team on 0845 257 1335 or via email at support@cerberusnetworks.co.uk.